# 3V-40V Vin, 500mA, Ultra-Low Quiescent Current LDO with Power-Good

## FEATURES

- Wide Input Range: 3V-40V
- With up to 45V Transient Input Voltage
- Maximum Output Current: 500mA
- Output Voltage:
  - 3.3V and 5V (Fixed Output)
  - 1.25V~25V (Adjustable Output Version)
- Output Voltage Accuracy:
  - $T_J$= 25℃：±1%
  - $T_J$= -40℃~ 125℃：±2%
- Ultra-Low Quiescent Current: 2.6μA
- Low Dropout Voltage：
  - 149mV at 150mA load current(EMSOP-8L package)
  - 165mV at 150mA load current(TO252-4L package)
- Support Output Capacitors Range:
  - 3.3uF~220uF
  - Low-ESR: 0.001Ω~ 5 Ω
- 1.5ms Internal Soft-start Time
- Current Limit Protection with VIN_HIGH Control
- Precision Enable Threshold for Programmable Input Voltage Under-Voltage Lock Out Protection (UVLO) Threshold and Hysteresis
- Power-Good and Programmable Power-Good delay
- Over-Temperature Protection
- Available Package：ESOP-8L/TO252-4L

## APPLICATIONS

- Automotive Head Units
- Headlights
- Body Control Modules
- Inverter and Motor Controls

## DESCRIPTION

The SCT71405 series products is a low-dropout linear regulator designed to operate with a wide input-voltage range from 3V to 40V and 500mA output current with enable control and Power-Good feature. The SCT71405 series products is stable with 3.3uF~220uF output capacitors, and 10uF ceramic capacitor is recommended.

Only 2.6μA typical quiescent current at light load makes the SCT71405 series products ideal choices for portable devices with battery power supply and an optimal solution for powering microcontrollers (MCUs) and CAN/LIN transceivers in always-on systems.


The SCT71405 series products implements power good circuit (PG) which indicates that output voltage is in regulation, and the Power-Good delay is Programmable. This signal could be used for power sequencing or as a microcontroller reset.

The SCT71405 series products integrated short-circuit and overcurrent protection with VIN_HIGH Control feature, which makes the device more reliable during transient high-load current faults or shorting events.

The SCT71405 series products provide fixed 3.3V and 5V output voltage versions, and also provide adjustable output version which can adjust the output voltage from 1.25V to 25V.

The SCT71405 series products is available in ESOP-8L and TO252-4L packages, for other package options, please contact SCT sales.

## TYPICAL APPLICATION

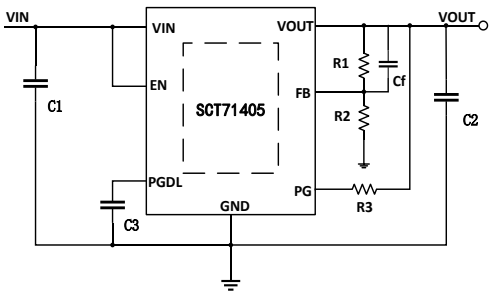

## REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Revision 1.0: Release to production(EMSOP-8L package).

Revision 1.1: Update the ELECTRICAL CHARACTERISTICS.

Revision 1.2: Update DEVICE ORDER INFORMATION, TAPE AND REEL INFORMATION and THERMAL INFORMATION.

Revision 1.3: Update the line regulation, load regulation and the functional block diagram.


Revision 1.4: Update figure 3 and figure 9. Update the MSL in device order information table.

## DEVICE ORDER INFORMATION

| Orderable Device | Output Voltage | Package | Package Marking | PINS | MSL | Transport Media, Quantity |
|---|---|---|---|---|---|---|
| SCT71405A00STER | Adjustable | ESOP-8L | 5A00 | 8 | 3 | Tape & Reel, 4000 |
| SCT71405F50BSTER | Fixed 5.0V | ESOP-8L | F50B | 8 | 3 | Tape & Reel, 4000 |
| SCT71405F33BSTER | Fixed 3.3V | ESOP-8L | F33B | 8 | 3 | Tape & Reel, 4000 |
| SCT71405F50OWCR | Fixed 5.0V | TO252-4L | 5F50 | 4 | 3 | Tape & Reel, 2500 |
| SCT71405F33OWCR | Fixed 3.3V | TO252-4L | 5F33 | 4 | 3 | Tape & Reel, 2500 |
| SCT71405F50AOWCR | Fixed 5.0V | TO252-4L | F50A | 4 | 3 | Tape & Reel, 2500 |


 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

## PIN CONFIGURATION

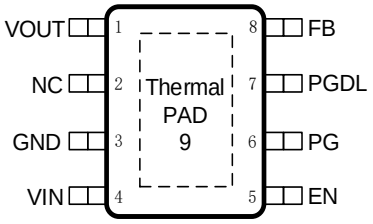



**SCT71405A00STER**

ESOP-8L Package

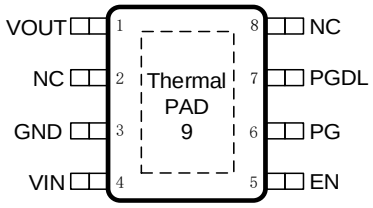



**SCT71405FxxBSTER**

ESOP-8L Package




**SCT71405FxxOWCR**

TO252-4L Package




**SCT71405FxxAOWCR**

TO252-4L Package

## PIN FUNCTIONS

| NAME | PIN FUNCTION | | |
|---|---|---|---|
| | ESOP-8L | ESOP-8L | |
| VOUT | 1 | 1 | Regulated output voltage pin |
| NC | 2 | 2,8 | No connection |
| GND | 3 | 3 | Ground reference pin. |
| VIN | 4 | 4 | Input voltage pin |
| EN | 5 | 5 | Enable input pin |
| PG | 6 | 6 | Power-good pin |
| PGDL | 7 | 7 | Programmable Power-Good Delay Time. |
| FB | 8 | — | Feedback Input for Output Adjustable Version |
| Thermal Pad | 9 | 9 | Connect the thermal pad to a large area GND plane for improved thermal performance. |

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved 

| NAME | PIN FUNCTION | | |
|---|---|---|---|
| | TO252-4L | TO252-4L | |
| VOUT | 4 | 4 | Regulated output voltage pin. |
| NC | 3 | — | No connection. |
| VIN | 1 | 1 | Input voltage pin. |
| EN | 2 | 3 | Enable input pin. |
| PG | — | 2 | Power-good pin. |
| Thermal Pad | 5 | 5 | Connect the thermal pad to a large area GND plane for improved thermal performance. |

## RECOMMENDED OPERATING CONDITIONS

Over operating free-air temperature range unless otherwise noted

| PARAMETER | DEFINITION | MIN | MAX | UNIT |
|---|---|---|---|---|
| $V_{IN}$ | Input voltage range | 3 | 40 | V |
| $V_{OUT}$ | Fixed Output voltage(TO252-4L package) | 3.3 | 5 | V |
| | Fixed Output voltage(EMSOP-8L package) | 3.3 | 5 | V |
| | Adjustable Output Version | 1.25 | 25 | V |
| $V_{EN}$ | Enable input voltage | 0 | $V_{IN}$ | V |
| $V_{PG}$ | Power-good pin voltage | 0 | 5 | V |
| $C_{IN}$ | Input capacitor | 2.2 | -- | uF |
| $C_{OUT}$ | Output capacitor | 3.3 | 220 | uF |
| ESR | Output capacitor ESR requirements | 0.001 | 5 | Ω |
| $T_A$ | Operating ambient temperature | -40 | 125 | °C |
| $T_J$ | Operating junction temperature | -40 | 125 | °C |

## ABSOLUTE MAXIMUM RATINGS

Over operating free-air temperature range unless otherwise noted (1)

| PARAMETER | DEFINITION | MIN | MAX | UNIT |
|---|---|---|---|---|
| $V_{IN}$ | Maximum input voltage range | -0.3 | 45 | V |
| $V_{OUT}$ | Maximum output voltage range | -0.3 | 25 | V |
| $V_{EN}$ | Maximum enable input voltage | -0.3 | $V_{IN}$ | V |
| $V_{PG}$ | Maximum power-good pin voltage | -0.3 | 25 | V |
| $V_{PGDL}$ | Maximum power-good delay pin voltage | -0.3 | 5.5 | V |
| $V_{FB}$ | Maximum feedback pin voltage | -0.3 | 5.5 | V |
| $T_J$ (2) | Junction temperature range | -40 | 150 | °C |
| $T_{stg}$ | Storage temperature range | -65 | 150 | °C |

(1) Stresses beyond those listed under Absolute Maximum Rating may cause device permanent damage. The device is not guaranteed to function outside of its Recommended Operation Conditions.

(2) The IC includes over temperature protection to protect the device during overload conditions. Junction temperature will exceed 150°C when over temperature protection is active. Continuous operation above the specified maximum operating junction temperature will reduce lifetime.

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

## ESD RATINGS

| PARAMETER | DEFINITION | MIN | MAX | UNIT |
|---|---|---|---|---|
| $V_{ESD}$ | Human Body Model(HBM), per ANSI-JEDEC-JS-001-2014 specification, all pins(1) | -4.5 | +4.5 | kV |
| | Charged Device Model(CDM), per ANSI-JEDEC-JS-002-2014 specification, all pins(2) | -2 | +2 | kV |

(1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved 

## THERMAL INFORMATION

The value of $R_{\theta JA}$ and $R_{\theta JC}$ given in this table is only valid for comparison with other packages and cannot be used for design purposes. Because they were simulated in accordance with JESD 51-7. They do not represent the performance obtained in an actual application. For design information see Power Dissipation and Thermal Performance section.

The value of $R_{\theta JA_EVM}$ is the tested results based on our EVM, and is more useful for thermal design. Even if it still do not represent the thermal performance of customer's PCB design, but it was a good starting point for thermal performance design.

The PCB information of our EVM: 4-layer, both the inner and outer layers are 1oz Cu, 50mm x 30mm size.

The values given in this table are not a characteristic of package itself, but of many other system level characteristics such as the design and layout of the printed circuit board (PCB), thermal pad size, and external environmental factors. The PCB board is a heat sink that is soldered to the leads and thermal pad of the device. Changing the design or configuration of the PCB board changes the efficiency of the heat sink and therefore the actual values of the below table.

| PARAMETER（4-layer） | THERMAL METRIC | ESOP-8L | UNIT |
|---|---|---|---|
| $R_{\theta JA}$ | Junction to ambient thermal resistance | 52.18 | °C/W |
| $\Psi_{JT}$ | Junction-to-top characterization parameter | 10.2 | |
| $\Psi_{JB}$ | Junction-to-board characterization parameter | 16.58 | |
| $R_{\theta JCtop}$ | Junction to case thermal resistance | 83.77 | |
| $R_{\theta JA_EVM}$ | junction to ambient thermal resistance | 33.21 | |
| **PARAMETER（4-layer）** | **THERMAL METRIC** | **TO252-4L** | **UNIT** |
| $R_{\theta JA}$ | Junction to ambient thermal resistance | 29.63 | °C/W |
| $\Psi_{JT}$ | Junction-to-top characterization parameter | 6.54 | |
| $\Psi_{JB}$ | Junction-to-board characterization parameter | 13.35 | |
| $R_{\theta JCtop}$ | Junction to case thermal resistance | 50.45 | |
| $R_{\theta JA_EVM}$ | junction to ambient thermal resistance | 24.22 | |

(1) $R_{\theta JA}$ is junction to ambient thermal resistance, based on JESD51-7.

(2) $R_{\theta JC}$ is junction to case thermal resistance, based on JESD51-7.

(3) $R_{\theta JA_EVM}$ is junction to ambient thermal resistance, which is tested on SCT EVM.

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

## ELECTRICAL CHARACTERISTICS

$V_{IN}$=$V_{OUT}$+1V, $C_{OUT}$=10uF, $T_J$= -40°C~125°C, typical value is tested under 25°C.

| SYMBOL | PARAMETER | TEST CONDITION | MIN | TYP | MAX | UNIT |
|---|---|---|---|---|---|---|
| **Power Supply** | | | | | | |
| $V_{IN}$ | Operating input voltage | | 3 | | 40 | V |
| $V_{UVLO}$ | $V_{IN}$ UVLO Threshold | $V_{IN}$ rising | | 2.49 | 2.81 | V |
| | Hysteresis(EMSOP-8L package) | | | 60 | | mV |
| | Hysteresis(TO252-4L package) | | | 30 | | mV |
| $I_{SHDN}$ | Shutdown current from VIN pin | EN=0, $V_{OUT}$=3.3V, $V_{IN}$=4.3V | | 0.29 | | μA |
| | | EN=0, $V_{OUT}$=5V, $V_{IN}$=6V | | 0.43 | | μA |
| | | EN=0, $V_{OUT}$=3.3V/5V, $V_{IN}$=12V | | 0.7 | | μA |
| $I_Q$ | Quiescent current from GND pin | EN float, no load, $V_{IN}$=$V_{OUT}$+1V （not include $I_{FB}$） | | 2.6 | | μA |
| | | EN float, no load, $V_{IN}$=12V （not include $I_{FB}$） | | 2.9 | | μA |
| | | EN float, no load, $V_{IN}$=$V_{OUT}$+1V （Fixed Output voltage） | | 4.2 | | μA |
| | | EN float, no load, $V_{IN}$=12V （Fixed Output voltage） | | 4.4 | | μA |
| **Regulated Output Voltage and Current** | | | | | | |
| $V_{OUT}$ | Output voltage accuracy | $T_J$= 25°C | -1% | | 1% | |
| | | $T_J$= -40°C~125°C | -2% | | 2% | |
| $\Delta V_{OUT}$ | Line regulation | $V_{IN}$=$V_{OUT}$+1V to 40V, Iout=1mA | | 1 | 10 | mV |
| | Load regulation | Iout=1mA to 500mA | | 10 | 70 | mV |
| $V_{REF}$ | Reference voltage of FB | $T_J$= 25°C | 1.238 | 1.25 | 1.262 | V |
| | | $T_J$= -40°C~125°C | 1.225 | 1.25 | 1.275 | V |
| $V_{DROP}$ | Dropout voltage(1) (EMSOP-8L package) | $V_{IN}$=$V_{OUT}$-0.1V ,Iout =100mA | | 98 | | mV |
| | | $V_{IN}$=$V_{OUT}$-0.1V ,Iout =150mA | | 149 | | mV |
| | | $V_{IN}$=$V_{OUT}$-0.1V ,Iout =500mA | | 663 | | mV |
| $V_{DROP}$ | Dropout voltage(TO252-4L package) | $V_{IN}$=$V_{OUT}$-0.1V ,Iout =100mA | | 108 | | mV |
| | | $V_{IN}$=$V_{OUT}$-0.1V ,Iout =150mA | | 165 | | mV |
| | | $V_{IN}$=$V_{OUT}$-0.1V ,Iout =500mA | | 730 | | mV |
| $I_{OUT}$ | Output current | $V_{OUT}$ in regulation | 0 | | 500 | mA |
| $I_{SC_VINLOW}$ | Short current limit | $V_{OUT}$=0V, VIN<30V | 520 | 700 | 850 | mA |
| $I_{SC_VINHIGH}$ | Short current limit | $V_{OUT}$=0V, VIN>30V | | 430 | | mA |
| PSRR | Power supply rejection ratio(2) | $I_{OUT}$=10mA, f=1kHz, $C_{OUT}$=10μF | | 54 | | dB |
| | | $I_{OUT}$=10mA, f=10kHz, $C_{OUT}$=10μF | | 36 | | dB |
| | | $I_{OUT}$=10mA, f=100kHz, $C_{OUT}$=10μF | | 43 | | dB |
| **Enable and Soft-startup** | | | | | | |
| $V_{EN_H}$ | Enable high threshold | | | 1.47 | | V |
| $V_{EN_L}$ | Enable low threshold | | | 1.27 | | V |
| $V_{EN_Hys}$ | Enable threshold hysteresis | | | 200 | | mV |
| $I_{EN_0V}$ | Enable pin pull-up current | EN=0V | | 0.27 | | μA |
| $T_{SS}$ | Soft-start time | | | 1.5 | | mS |

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved 

| SYMBOL | PARAMETER | TEST CONDITION | MIN | TYP | MAX | UNIT |
|---|---|---|---|---|---|---|
| **Power Good** | | | | | | |
| $V_{PG_R}$ | PG rising threshold percentage | $V_{OUT}/V_{OUT(NOM)}$,when $V_{OUT}$ rising(EMSOP-8L package) | | 92% | | |
| $V_{PG_F}$ | PG falling threshold percentage | $V_{OUT}/V_{OUT(NOM)}$,when $V_{OUT}$ falling(EMSOP-8L package) | | 86% | | |
| $V_{PG_R}$ | PG rising threshold percentage | $V_{OUT}/V_{OUT(NOM)}$,when $V_{OUT}$ rising(TO252-4L package) | | 89% | | |
| $V_{PG_F}$ | PG falling threshold percentage | $V_{OUT}/V_{OUT(NOM)}$,when $V_{OUT}$ falling(TO252-4L package) | | 89% | | |
| $V_{PG_LOW}$ | PG output low voltage | PG sink 1mA | | 142 | | mV |
| $R_{PG}$ | PG pull down resistor | $R_{PG}=V_{PG_LOW}/1mA$ | | 142 | | Ω |
| $I_{PG_LKG}$ | PG leakage current | PG=5V, $V_{OUT}$ in regulation | | | 0.2 | uA |
| $Td_{_PGR}$ | PG signal turn to high delay | From $V_{OUT}$>0.92x$V_{OUT(NOM)}$ to PG rising edge delay time(EMSOP-8L package) | | 50 | | us |
| $Td_{_PGF}$ | PG signal turn to low delay | From $V_{OUT}$<0.86x$V_{OUT(NOM)}$ to PG falling edge delay time(EMSOP-8L package) | | 20 | | us |
| $Td_{_PGR}$ | PG signal turn to high delay | From $V_{OUT}$>0.89x$V_{OUT(NOM)}$ to PG rising edge delay time(TO252-4L package) | | 300 | | us |
| $Td_{_PGF}$ | PG signal turn to low delay | From $V_{OUT}$<0.89x$V_{OUT(NOM)}$ to PG falling edge delay time(TO252-4L package) | | 23 | | us |
| $I_{PGDL}$ | PGDL charging current | | | 16 | | uA |
| $V_{PGDL_R}$ | PGDL rising threshold | | | 1.77 | | V |
| $V_{PGDL_F}$ | PGDL falling threshold | | | 0.387 | | V |
| **Thermal Protection** | | | | | | |
| $T_{SD}$ | Thermal shutdown threshold(3) | $T_J$ rising<br>Hysteresis | | 175<br>12 | | °C<br>°C |

(1) The dropout voltage is defined as $V_{IN}$-$V_{OUT}$, when force $V_{IN}$ is 100mV below the value of $V_{OUT}$ for $V_{IN}=V_{OUT(NOM)}$+1V.

(2) PSRR is derived from bench characterization, not production test.

Thermal shutdown threshold is derived from bench characterization, not production test.

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

## TYPICAL CHARACTERISTICS

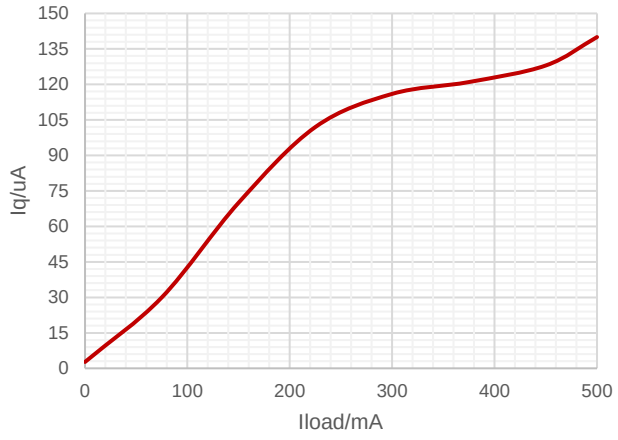



Figure 1. Quiescent Current vs Output Current

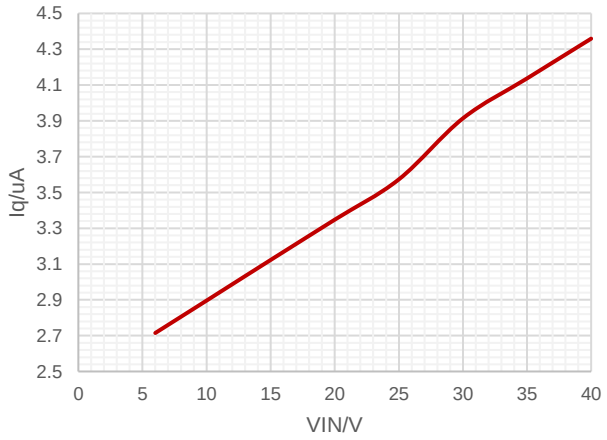



Figure 2. Quiescent Current vs Input Voltage, No load

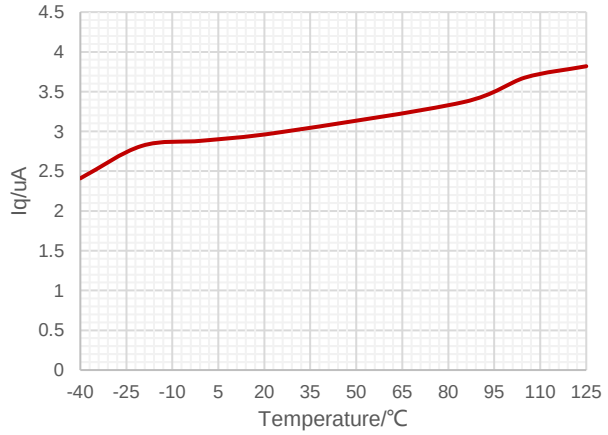



Figure 3. Quiescent Current vs Ambient Temperature

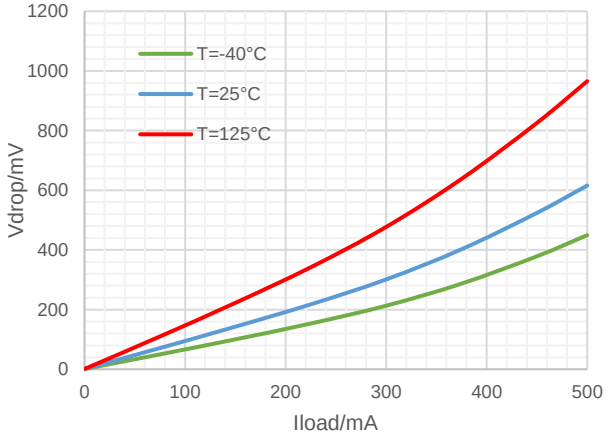



Figure 4. Dropout Voltage vs Output Current

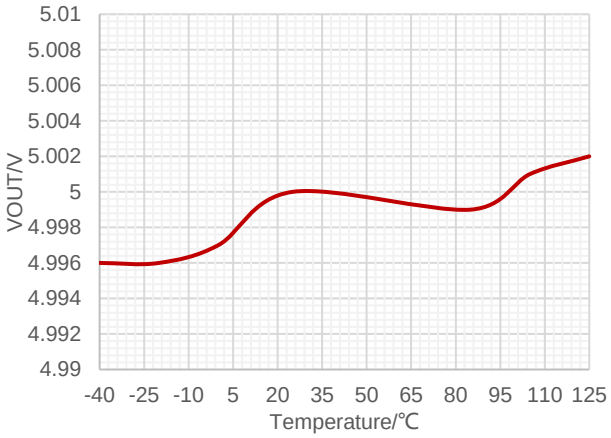



Figure 5. Output Voltage vs Ambient Temperature at VOUT=5V

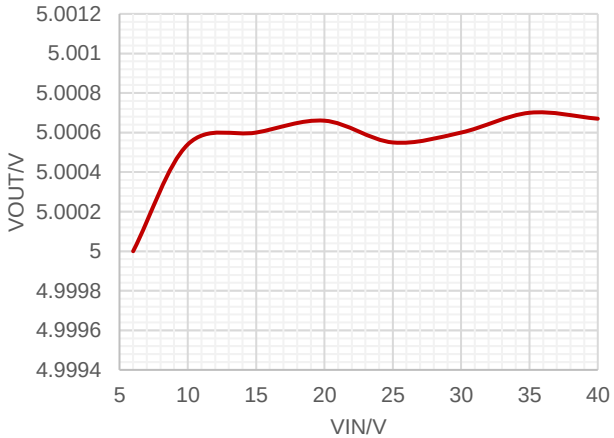



Figure 6. Output Voltage vs Input Voltage

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved 

## TYPICAL CHARACTERISTICS (continued)

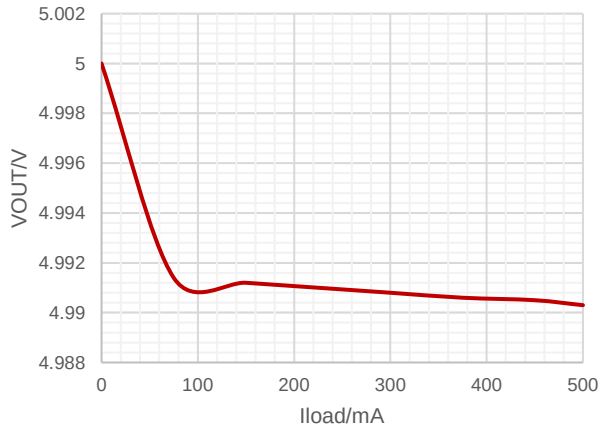



Figure 7. Output Voltage vs Output Current

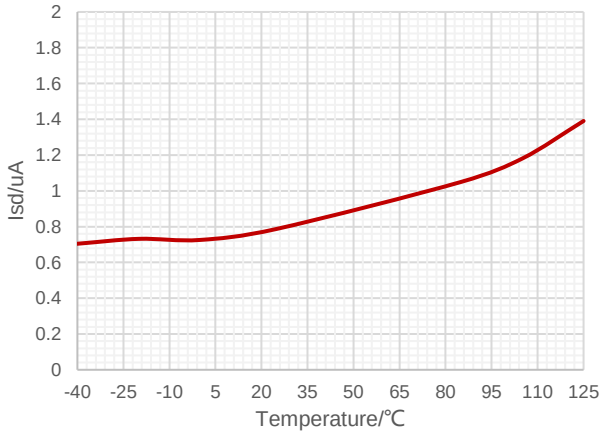



Figure 8. Shutdown Current vs Ambient Temperature

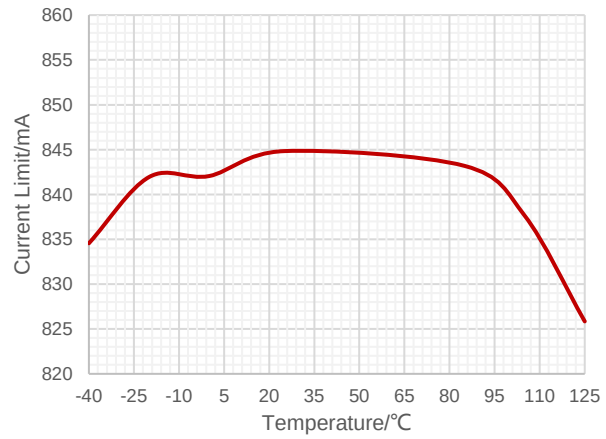



Figure 9. Output Current Limit vs Ambient Temperature at VIN<30V

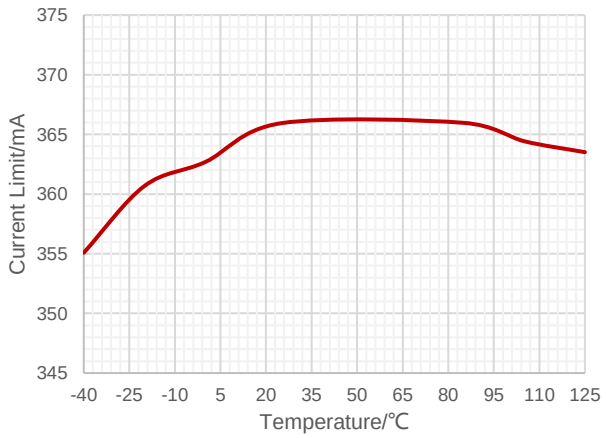



Figure 10. Output Current Limit vs Ambient Temperature at VIN≥30V

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

## TYPICAL CHARACTERISTICS (continued)

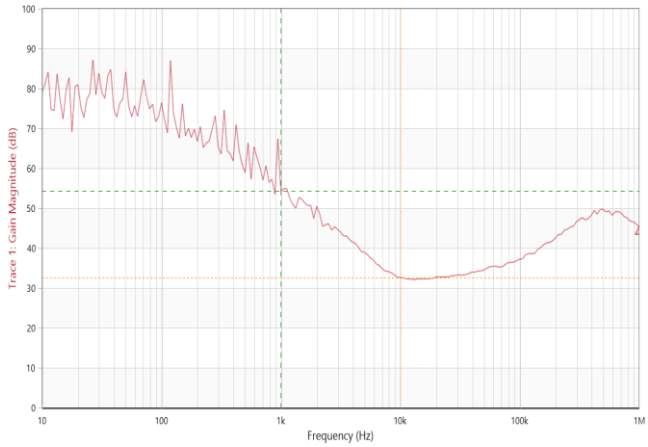



Figure 11. PSRR vs Frequency at Iout=10mA, $C_{OUT}$=4.7uF

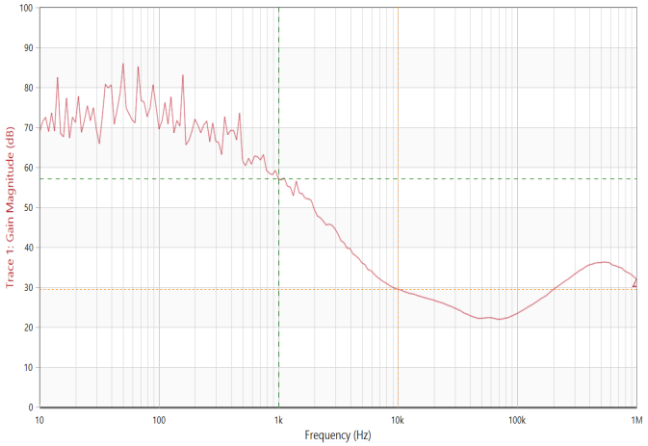



Figure 12. PSRR vs Frequency at Iout=100mA, $C_{OUT}$=4.7uF

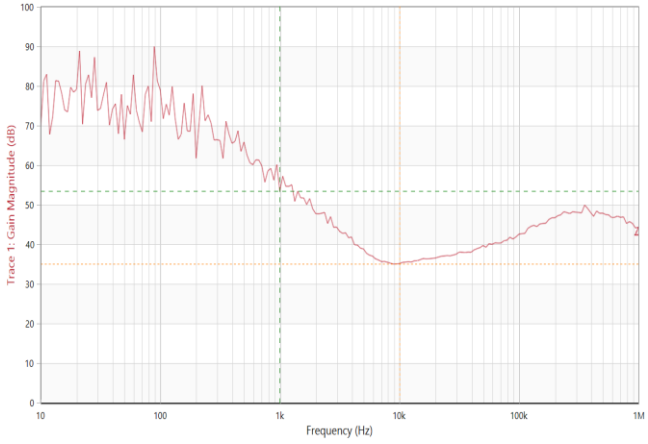



Figure 13. PSRR vs Frequency at Iout=10mA, $C_{OUT}$=10uF

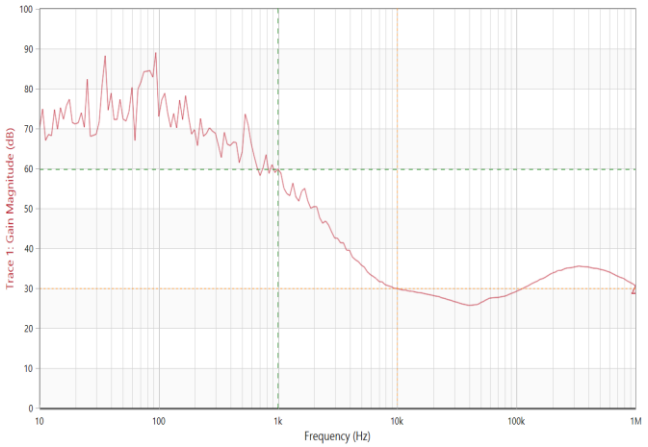



Figure 14. PSRR vs Frequency at Iout=100mA, $C_{OUT}$=10uF

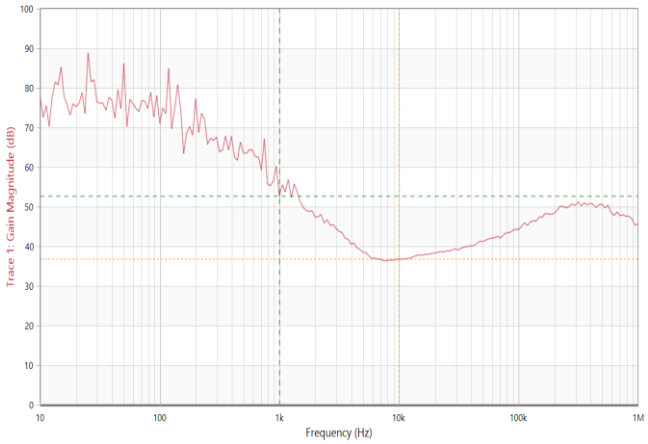



Figure 15. PSRR vs Frequency at Iout=10mA, $C_{OUT}$=22uF

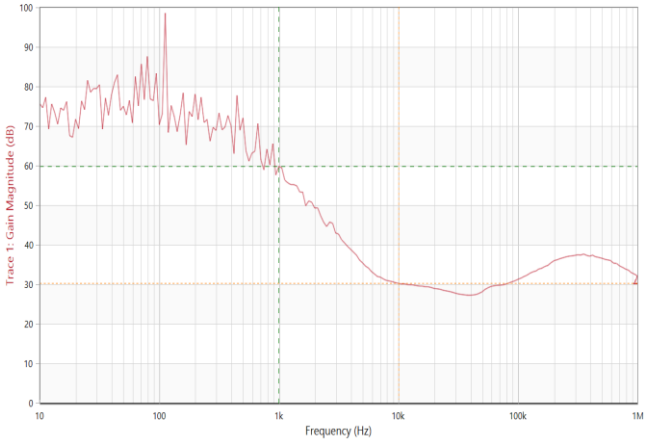



Figure 16. PSRR vs Frequency at Iout=100mA, $C_{OUT}$=22uF

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved 

## FUNCTIONAL BLOCK DIAGRAM

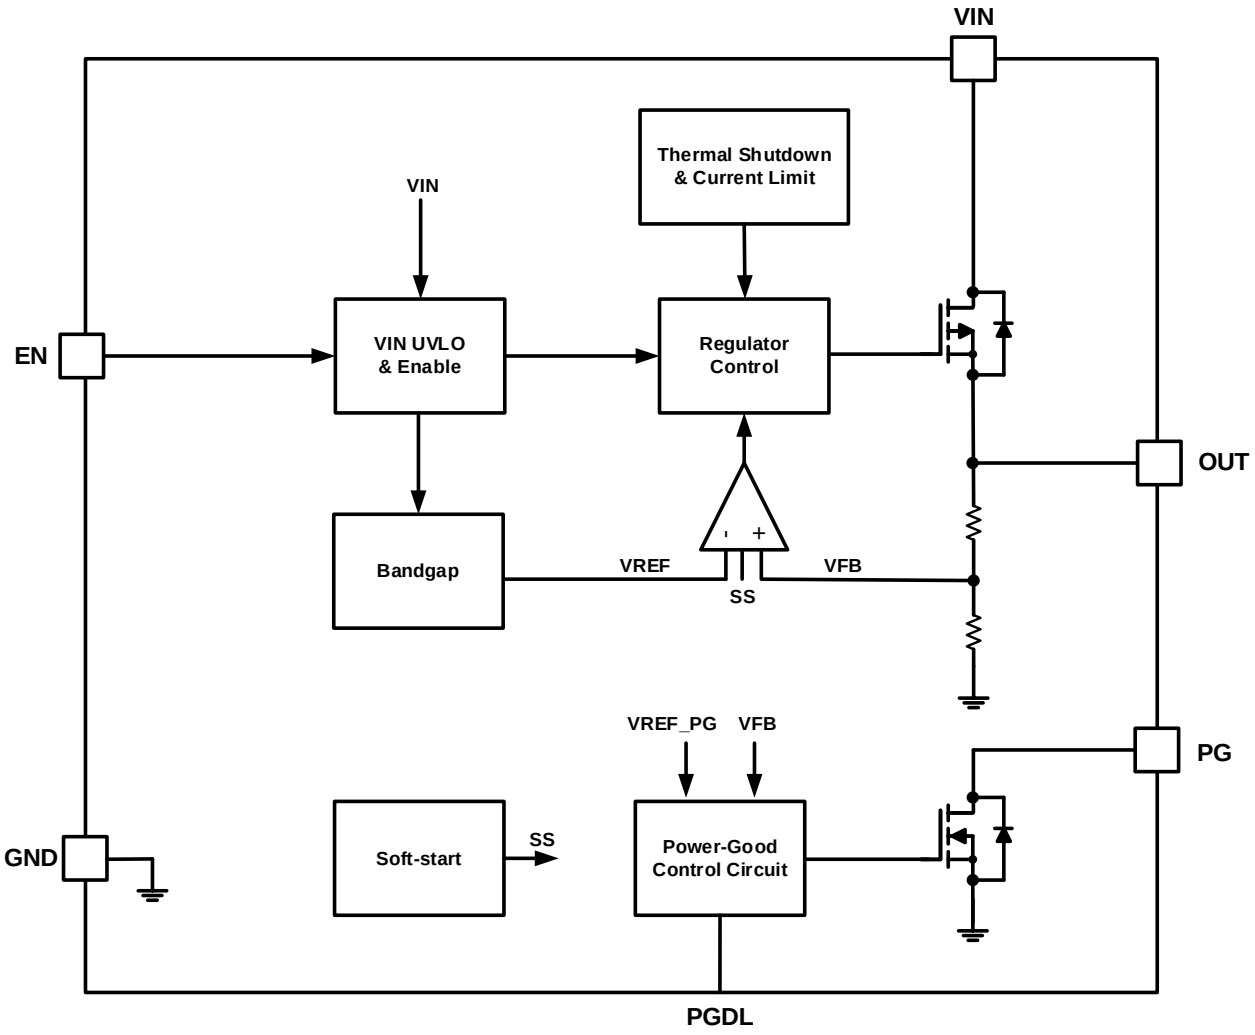



Figure 17. Fixed Output Version Functional Block Diagram

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

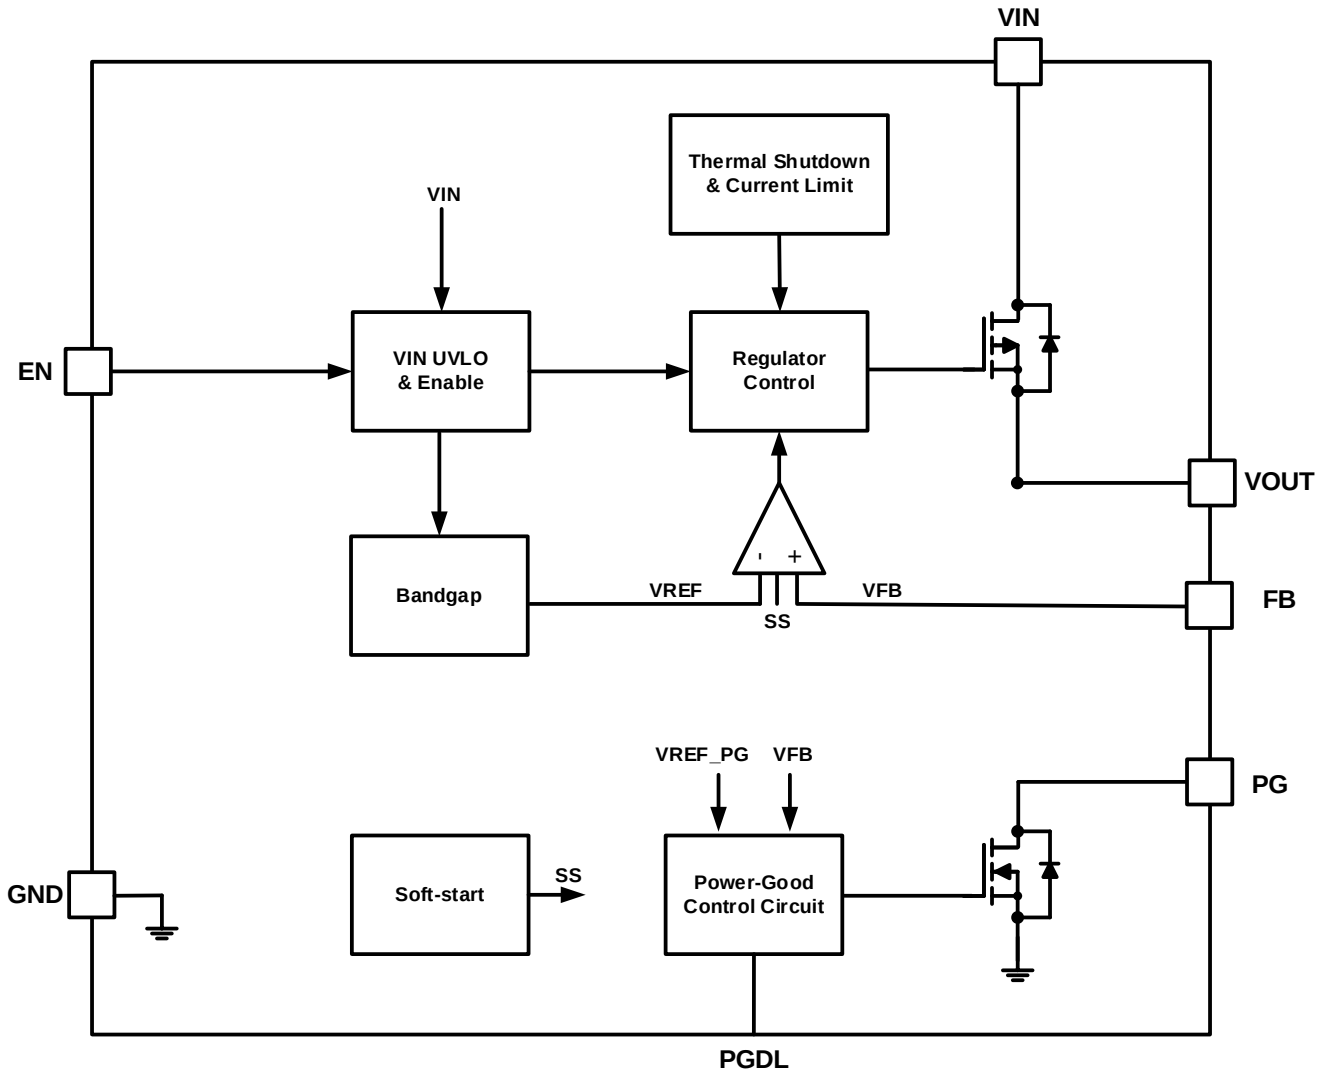



Figure 18. Adjustable Output Version Functional Block Diagram

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved 

# OPERATION

### Overview

The SCT71405 series products are 500mA wide input voltage range linear regulators with very low quiescent current. These voltage regulators operate from 3V to 40V DC input voltage with supporting 45V transient input voltage and consume 2.6μA quiescent current at no load.

The SCT71405 series products is stable with 3.3uF~220uF output capacitors, and 10uF ceramic capacitor is recommended. An internal 1.5ms soft-start time avoids large inrush current and output voltage overshoot during startup.

The SCT71405 series products also provide enable control, Power-Good feature and programmable Power-Good delay time which is very suitable for the applications needing sequence configuration. Other protection features include the VIN input under-voltage lockout, over current protection, output hard short protection and thermal shutdown protection.

The SCT71405 series products are available in fixed voltage versions of 3.3V and 5V with 1% output voltage accuracy at room temp and 2% output voltage accuracy over operating conditions. The series products are available in ESOP-8L and TO252-4L packages.

The SCT71405 series products also provide adjustable output version which can adjust the output voltage from 1.25V to 25V. If you need a new output voltage version or a new package option, please feel free to contact SCT sales.

### Enable and Under Voltage Lockout Threshold

The SCT71405 series products is enabled when the VIN pin voltage rises above 2.49V and the EN pin voltage exceeds the enable threshold $V_{EN_H}$. The device is disabled when the VIN pin voltage falls below 2.49V or when the EN pin voltage is below $V_{EN_L}$. Internal pull up current source to EN pin allows the device enable when EN pin floats.

For a higher system UVLO threshold, connect an external resistor divider (R1 and R2) from VIN to GND shown in Figure 18. The UVLO rising and falling threshold can be calculated by Equation 1 and Equation 2 respectively.

$$VIN_{rise} = V_{EN_H} * \frac{R1 + R2}{R2} \quad (1)$$

$$VIN_{hys} = (V_{EN_H} - V_{EN_L}) * \frac{R1 + R2}{R2} \quad (2)$$

Where

$VIN_{rise}$: Vin rise threshold to enable the device

$VIN_{hys}$: Vin hysteresis threshold

$I_1$=0.27uA and could be neglected in the calculation

$V_{EN_H}$=1.47V

$V_{EN_L}$=1.27V

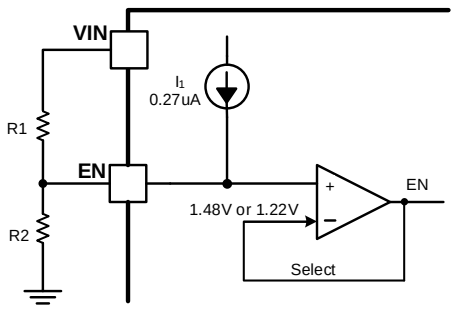



Figure 19. System UVLO by enable divide

### Regulated Output Voltage

The SCT71405 series are available in fixed voltage versions of 3.3V and 5V. When the input voltage is higher than $V_{OUT(NOM)}$+$V_{DROP}$, output pin is the regulated output based on the selected voltage version. When the input voltage falls below $V_{OUT(NOM)}$+$V_{DROP}$, output pin tracks the input voltage minus the dropout voltage based on the load current. When the input voltage drops below UVLO threshold, the output keeps shut off.

The SCT71405 series products also provide adjustable output version which can adjust the output voltage from 1.25V to 25V. Please feel free to contact SCT sales, if you need a new output voltage version or a new package

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

option.

### Over Current Limit and Foldback Current Limit

The SCT71405 series products has an internal current limit circuit that protects the regulator during transient high-load current faults or shorting events. The current limit is 700mA when VIN<30V, but SCT71405 supplies a fold-back current limit 430mA when VIN>30V.

The output voltage is not regulated when the device is in current limit. When a current limit event occurs, the regulator begins to heat up because of the increase in power dissipation. If thermal shutdown is triggered, the device turns off. After the device cools down, the internal thermal shutdown circuit turns the device back on. If the output current fault condition persists, the device cycles between current limit and thermal shutdown.

With the over current VIN_HIGH Control feature, the SCT71405 series products would be more robust and safer when over current faults and shorting events occur. But it also requires the maximum loading current should be smaller than Isc during startup. The characteristic is shown in the following figure.

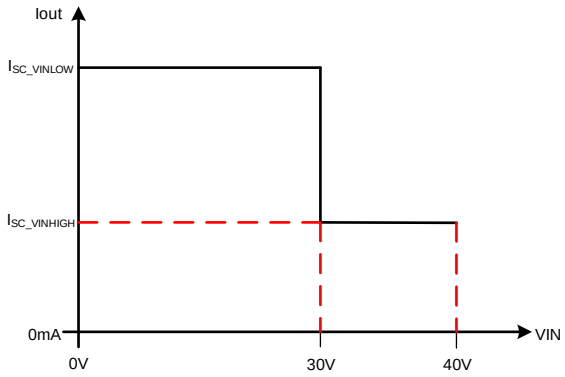



Figure 20. Current Limit with Foldback Feature

### Internal Soft-Start

The SCT71405 series products integrates an internal soft-start circuit that ramps the reference voltage from zero volts to 0.6V reference voltage in 1.5ms. If the EN pin is pulled below 1.27V, LDO will be shut off and the internal soft-start resets. The soft-start also resets during shutdown due to thermal overloading.

Below figure shows the startup waveform at small output capacitor and large output capacitor. When output capacitor is small, for example 10uF, the slope of VOUT is limited by soft-start. When output capacitor is large, for example 100uF, the slope of VOUT is limited by current limit ($I_{SC_VINLOW}$) at VIN<30V, and the slope of VOUT is limited by current limit ($I_{SC_VINHIGH}$), when VIN> 30V.

In SCT71405 series products, typical Tss is 1.5ms, and typical $I_{SC_VINLOW}$ is 700mA and typical $I_{SC_VINHIGH}$ is 430mA, could use the following formula for initial startup time calculation.

$$\text{Tstart} = \max\left\{\frac{C_{OUT}\times V_{OUT}}{(I_{sc}-I_{load})}, T_{SS}\right\} \quad (3)$$

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved 

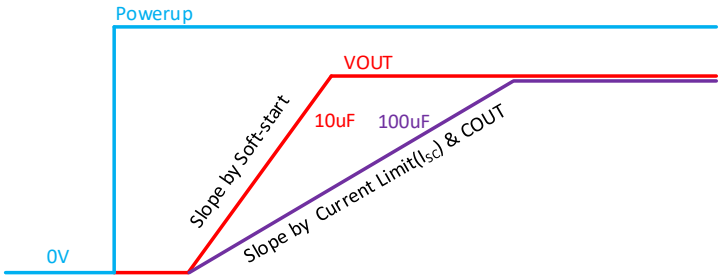



Figure 21. Soft-start Waveform vs Output Capacitor

**Power-Good and Power-Good Delay**

The power-good (PG) pin is an open-drain output and can be connected to any 5V or lower rail through an external pull-up resistor. The PG output is high-impedance when VOUT is greater than the PG trip threshold (he following text takes EMSOP-8L package as an example, $V_{PG_R}$=92% x $V_{OUT(NOM)}$). If VOUT drops below $V_{PG_F}$=86% x $V_{OUT(NOM)}$, the open-drain output turns on and pulls the PG output low. If output voltage monitoring is not needed, the PG pin can be left floating or connected to GND.

The power-good delay time ($Td_{_PGR}$) is defined as the time period from when $V_{OUT}$ exceeds the PG trip threshold voltage ($V_{PG_R}$) to when the PG output is high. This power-good delay time is set by an internal time, which is 220us typical. The power-good deglitch time ($Td_{_PGF}$) is defined as the time period from when $V_{OUT}$ fall below the PG trip threshold voltage ($V_{PG_F}$) to when the PG output is low. This power-good deglitch time is set by an internal time, which is 6.6us typical. This delay time can be programmed by adding a capacitor on PGDL.To select a capacitor for PGDL, use the equation 4:

$$C_{PGDL} = \frac{t_{PGDL} * I_{PGDL}}{V_{PGDL}} \quad (4)$$

where:

- $t_{PGDL}$ is the desired delay time for PG rising.
- $I_{PGDL}$ is the PGDL charging current.
- $V_{PGDL_R}$=1.77V.

To ensure proper operation of the power-good feature, maintain $V_{IN} \geqslant$ 3V ($V_{IN_MIN}$). It allows connections of PG pin to circuit with the same or different power supply voltage to the LDO's VOUT level. Below are the connections examples.

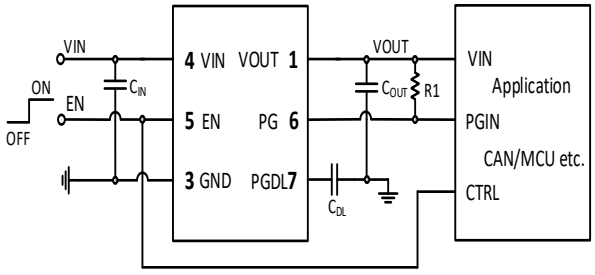



Figure 22. PG Connected to LDO's Ouput

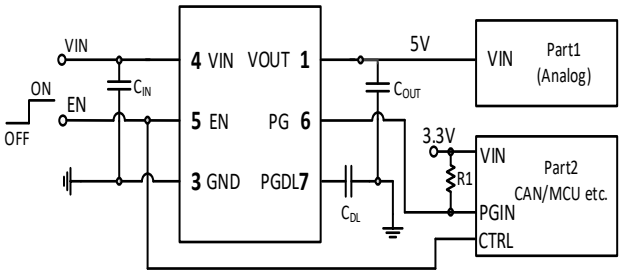



Figure 23. PG Connected to the other Power Supply

Below figure shows the startup and shutdown situation when slow power up and power down.

At the point 0, the input voltage starts to rise from 0 to 6 V, LDO is in shutdown (because VIN is below its UVLO threshold) and output voltage is 0V.

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

At the point 1, the VIN voltage reaches UVLO threshold level and LDO starts charging of output capacitor. VOUT rising speed is defined by internal soft-start function.

At the point 2, the VOUT voltage reaches almost the VIN voltage as it rises faster and LDO gets into dropout region. The difference between VIN and VOUT is the dropout voltage.

At the point 3, the VOUT reaches PG threshold ($V_{PG_R}$=92% x $V_{OUT(NOM)}$) and from this point LDO counts the power good delay time ($Td_{_PGR}$). After this delay, the PG pin rises to high level showing that VOUT is ok.

At the point 4, the VOUT reaches its nominal value (5.0V) as the VIN starts to be higher than ($V_{OUT(NOM)}$ + $V_{DROP}$) and LDO gets into regulation region.

At the point 5, as the VIN voltage slow power down and LDO returns to dropout region again.

At the point 6, the VOUT drops below PG threshold ($V_{PG_F}$=86% x $V_{OUT(NOM)}$) and LDO starts counting the power good deglitch time ($Td_{_PGF}$), which filters fast VOUT undershoots (caused for example by line/load transient responses). After this delay, the PG output is shorted to 0 V level to highlight “power fail” state.

At the point 7, the VIN voltage is lower than input voltage UVLO threshold minus UVLO hysteresis level and LDO goes into the shutdown state.

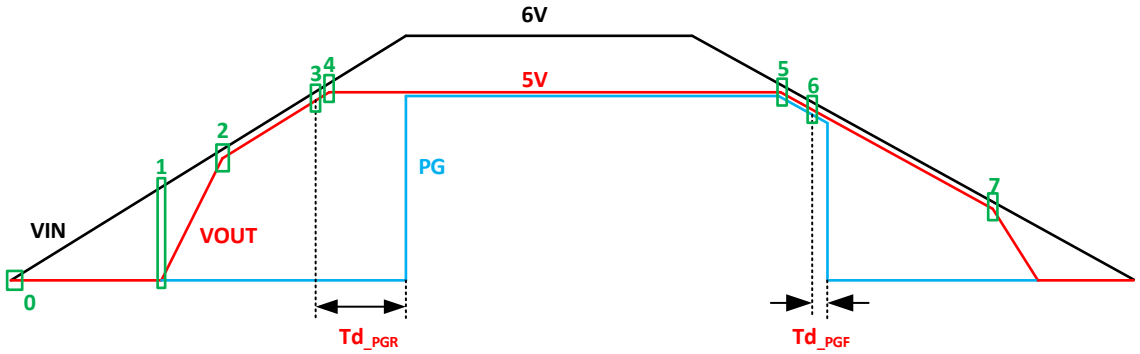



Figure 24. Startup and Shutdown Example —SCT71405 Series

### Thermal Shutdown

This device incorporates a thermal shutdown ($T_{SD}$) circuit as a protection from overheating. For continuous normal operation, the junction temperature should not exceed the $T_{SD}$ trip point. The junction temperature exceeding the $T_{SD}$ trip point causes the output to turn off. When the junction temperature falls below the $T_{SD}$ trip point minus thermal shutdown hysteresis, the output turns on again.

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved 

## APPLICATION INFORMATION

### Typical application 1:

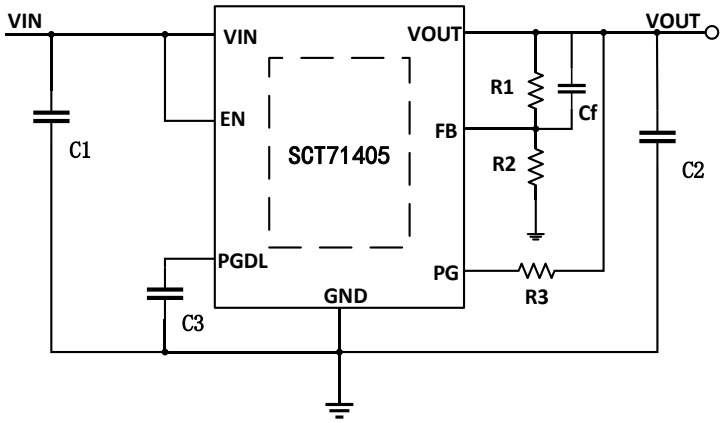



Figure 25. SCT71405 Typical Application Schematic

**Design Parameters**

| Design Parameters | Example Value |
|---|---|
| Input Voltage | 12V Normal, 3V~40V |
| Output Voltage | 5V Normal,1.25V~25V |
| Maximum Output Current | 500mA |
| Output Capacitor Range ($C_2$) | 3.3uF~220uF , recommends 10uF |
| Input Capacitor Range ($C_1$) | >2.2uF , recommends 10uF |
| Pull-up resistor of power-good (R3) | 10kΩ~100kΩ |

### Typical application 2:

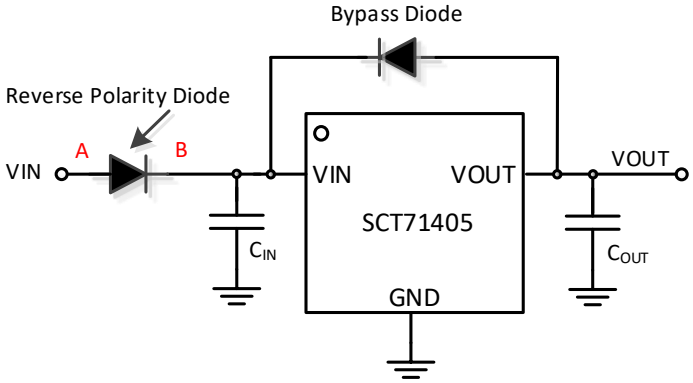



Figure 26. SCT71405 Typical Application Schematic with Reverse Polarity Diode

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

**Design Parameters**

| Design Parameters | Example Value |
|---|---|
| Input Voltage | 12V Normal, 3V~40V |
| Output Voltage | 5V Normal, 1.25V~25V |
| Maximum Output Current | 500mA |
| Output Capacitor Range ($C_{OUT}$) | 3.3uF~220uF , recommends 10uF |
| Input Capacitor Range ($C_{IN}$) | >2.2uF , recommends 10uF |

In some applications, the VIN and the VOUT potential might be reversed, possibly resulting in circuit internal damage or damage to the elements. For example, the accumulated charge in the output pin capacitor flowing backward from the VOUT to the VIN when the VIN shorts to the GND. In order to minimize the damage in such case, use a capacitor with a capacitance less than 220μF. Also by inserting a reverse polarity diode in series to the VIN, it can prevent reverse current from reverse battery connection or the case, when the point A is short-circuited GND. If there may be any possible case point B is short-circuited to GND, we also recommend using a bypass diode between the VIN and the VOUT.

**Typical application 3:**

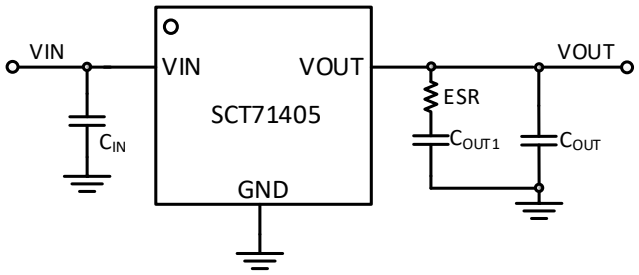



Figure 27. SCT71405 Typical Application Schematic with Large Output Capacitor

**Design Parameters**

| Design Parameters | Example Value |
|---|---|
| Input Voltage | 12V Normal, 3V~40V |
| Output Voltage | 5V Normal, 1.25V~25V |
| Maximum Output Current | 500mA |
| Output Capacitor Range ($C_{OUT1}$ and ESR) | 3.3uF~220uF with ESR=0.5Ω~5Ω |
| Output Capacitor Range ($C_{OUT2}$) | recommends 10uF with low ESR |
| Input Capacitor Range ($C_{IN}$) | >2.2uF , recommends 10uF |

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved 

### Output Voltage

For adjustable output version the output voltage is set by an external resistor divider R1 and R2 in typical application schematic. Recommended R2 resistance is 100KΩ. Use equation 4 to calculate R1.

$$R_1 = \left(\frac{V_{OUT}}{1.25\text{V}} - 1\right) * R_2 \quad (5)$$

**Table 1: Compensation Values for Typical Output Voltage/Capacitor Combinations**

| Vout/V | COUT/uF | Cf/pF | R1/KΩ | R2/KΩ | COUT1/uF (optional) | ESR/Ω |
|---|---|---|---|---|---|---|
| 1.8 | 33 | 68 | 48.7 | 100 | 220 | 1 |
| 2.5 | 33 | 33 | 105 | 100 | 220 | 1 |
| 3.3 | 15 | 22 | 174 | 100 | 220 | 1 |
| 5 | 15 | 10 | 309 | 100 | 220 | 1 |
| 12 | 15 | 3.3 | 887 | 100 | 220 | 1 |

### Input Capacitor and Output Capacitor

SCT recommends adding a 2.2μF or greater capacitor with a 0.1μF bypass capacitor in parallel at VIN pin to keep the input voltage stable. Aluminum electrolytic capacitor or other capacitor with high capacitance is suggested for the system power with large voltage spike. The voltage rating of the capacitors must be greater than the maximum input voltage

To ensure loop stability, the SCT71405 series products requires an output capacitor with a minimum effective capacitance value of 3.3μF. And the series products could support output capacitor range from 3.3uF to 220uF and with an ESR range between 0.001Ω and 5Ω. SCT recommends selecting a X5R- or X7R-type 4.7uF~10uF ceramic capacitor with low ESR over temperature range to improve the load transient response.

When using large output capacitor with higher ESR resistor, for example 100uF output electrolytic capacitor with 1Ω ESR resistor in the application, SCT recommends adding extra 10uF low ESR output capacitor parallel connection with the large electrolytic capacitor, this will eliminate the undershoot/overshoot voltage caused by the large ESR resistor and get better load transient performance.

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

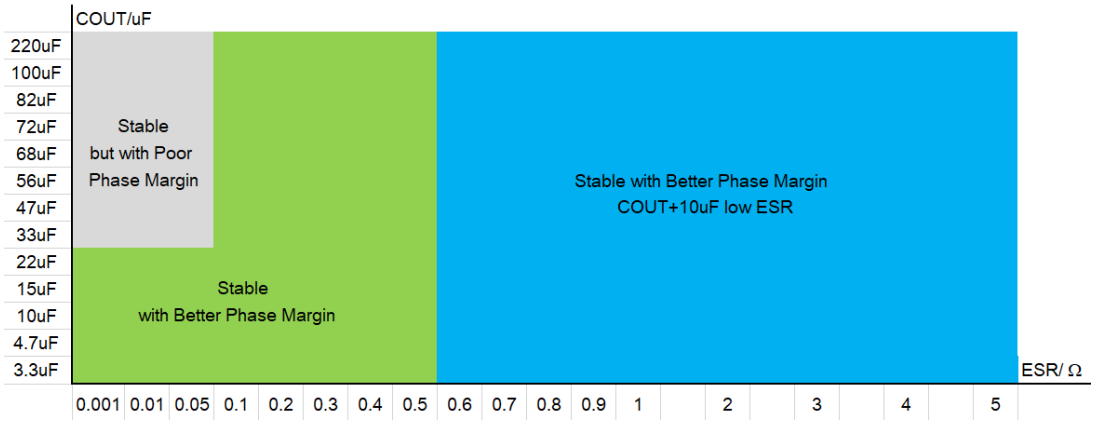



Figure 28. SCT71405 Stability VS Output Capacitor

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved 

**Power Dissipation and Thermal Performance**

Power dissipation caused by voltage drop across the LDO and by the output current flowing through the device needs to be dissipated out from the chip. The maximum junction temperature is dependent on power dissipation, package, the PCB layout, number of used Cu layers, Cu layer thickness and the ambient temperature.

During normal operation, LDO junction temperature should not exceed 150°C, or else it may result in deterioration of the properties of the chip. Using below equations to calculate the power dissipation and estimate the junction temperature.

The power dissipation can be calculated using Equation 6. Because $I_{GND}$ « $I_{OUT}$, the term $V_{IN}$ x $I_{GND}$ in Equation 6 could be ignored.

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT} + V_{IN} \times I_{GND} \quad (6)$$

The junction temperature can be estimated using Equation 7. $R_{\theta JA_EVM}$ is the junction-to-ambient thermal resistance based on customer's PCB. Verify the application and allow sufficient margins in the thermal design by the following method is used to calculate the junction temperature $T_J$.

$$T_J = T_A + P_D \times R_{\theta JA_EVM} \quad (7)$$

$R_{\theta JA_EVM}$ is a critical parameter and depends on many factors such as the following:

- Power dissipation
- Air temperature/flow
- PCB area
- Copper heat-sink area
- Number of thermal vias under the package
- Adjacent component placement

For the SCT71405 series products, the maximum allowable power dissipation of different packages was listed in the following table, and the test results are based on our EVM board, larger power dissipation will trigger thermal shutdown protection. As a result, we could calculate the $R_{\theta JA_EVM}$ of different packages. The following table is just for your reference based on our EVM test, please leave enough margin when you design thermal performance.

The PCB information of our EVM: 4-layer, both the inner and outer layers are 1oz Cu, 50mm x 30mm size.

**Thermal Performance of Different Packages Based on EVM Test**

| Package(4-layer) | Max Allowable PD (W) (Not Trigger TSD,VOUT=5V) | Max Allowable PD (W) (TJ≤125℃) | $R_{\theta JA_EVM}$ (℃/W) |
|---|---|---|---|
| ESOP-8L | 4.517 | 3.011 | 33.21 |
| **Package(4-layer)** | **Max Allowable PD (W) (Not Trigger TSD,VOUT=5V)** | **Max Allowable PD (W) (TJ≤125℃)** | **$R_{\theta JA_EVM}$ (℃/W)** |
| TO252-4L | 6.193 | 4.129 | 24.22 |

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

## THERMAL CHARACTERISTICS

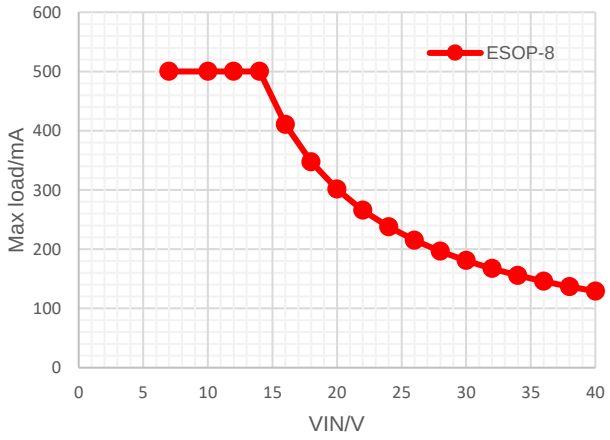



Figure 29. Maximum Output Current vs Input Voltage, VOUT=5V of ESOP-8L ,$T_J$ ≤ TSD_R(4-layer EVM)

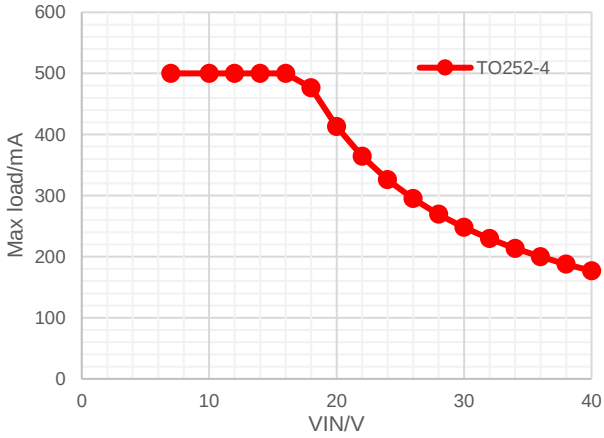



Figure 30. Maximum Output Current vs Input Voltage, VOUT=5V of TO252-4L ,TJ ≤ TSD_R(4-layer EVM)

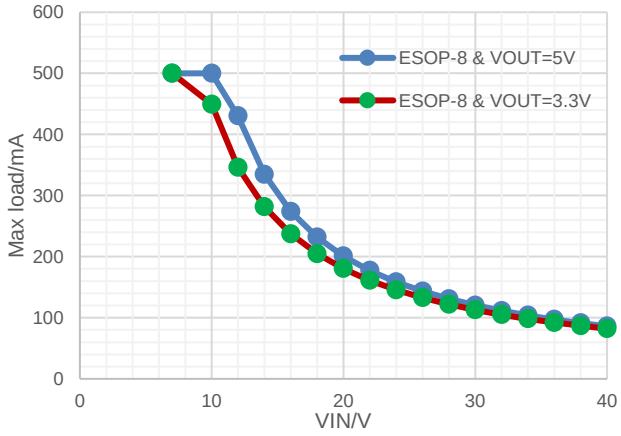



Figure 31. Maximum Output Current vs Input Voltage, ESOP-8L,TJ ≤ 125℃(4-layer EVM)

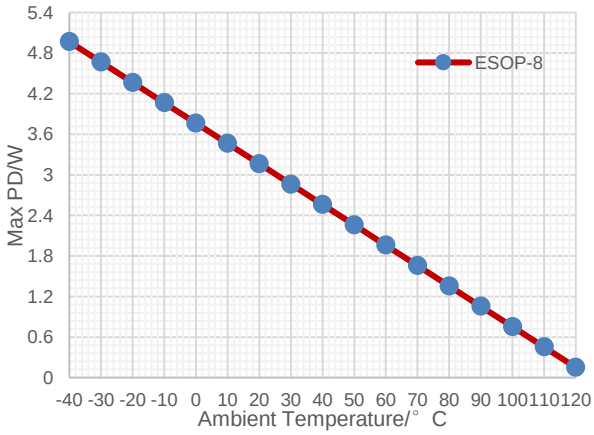



Figure 32. Maximum Allowed Power Dissipation vs Ambient Temperature, ESOP-8L,TJ ≤ 125℃(4-layer EVM)

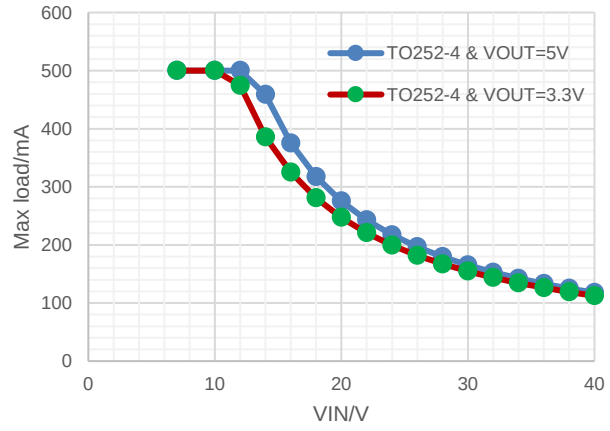



Figure 33. Maximum Output Current vs Input Voltage, TO252-4L,TJ ≤ 125℃(4-layer EVM)

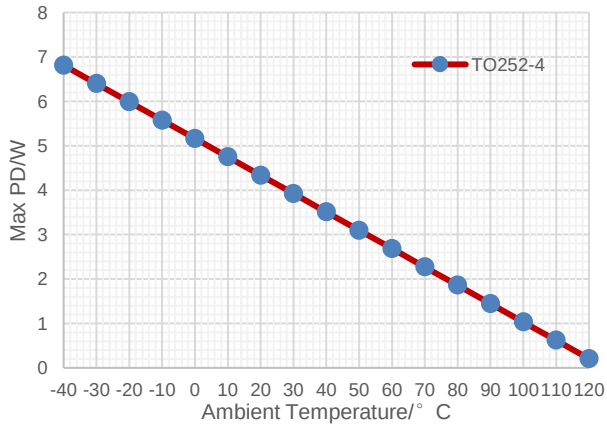



Figure 34. Maximum Allowed Power Dissipation vs Ambient Temperature, TO252-4L,TJ ≤ 125℃(4-layer EVM)

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved 

### Application Waveforms

Vin=Vout +1V, unless otherwise noted

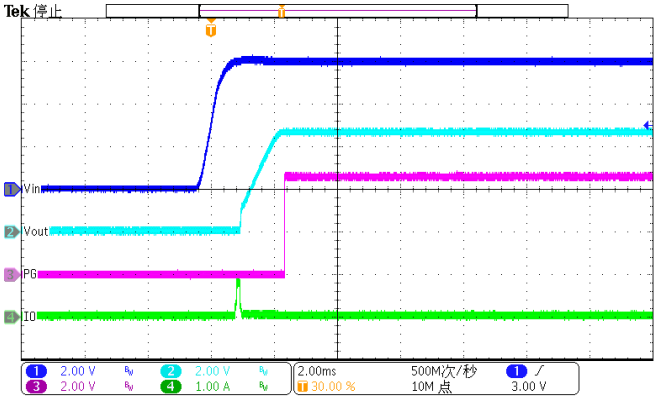



Figure 35. Power up (Iload=10mA)

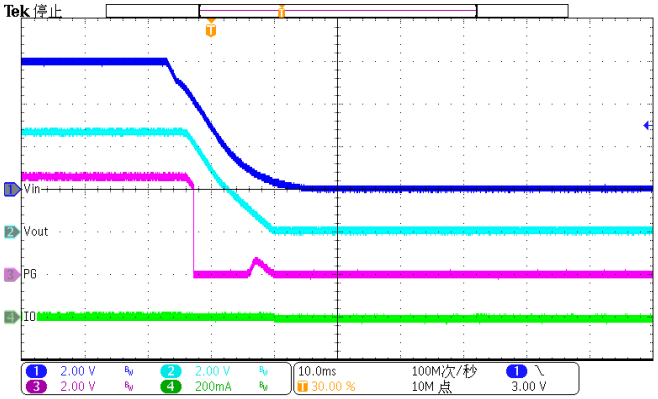



Figure 36. Power down (Iload=10mA)

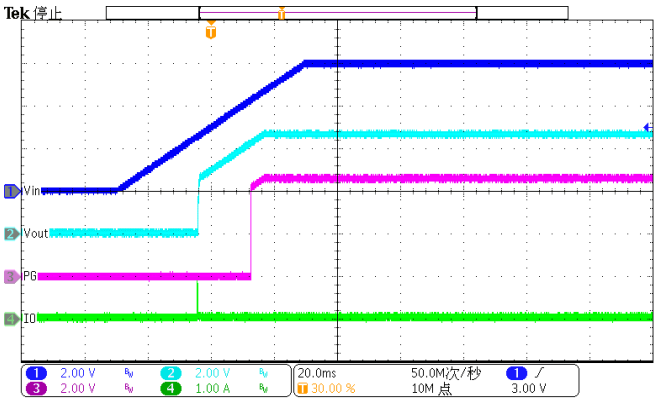



Figure 37. Slow Power up (Iload=10mA)

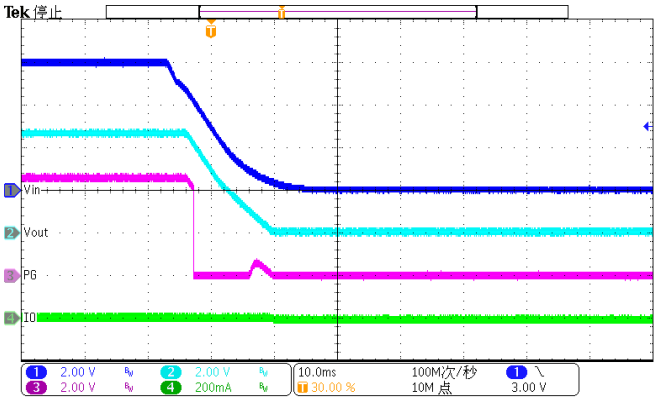



Figure 38. Slow Power down (Iload=10mA)

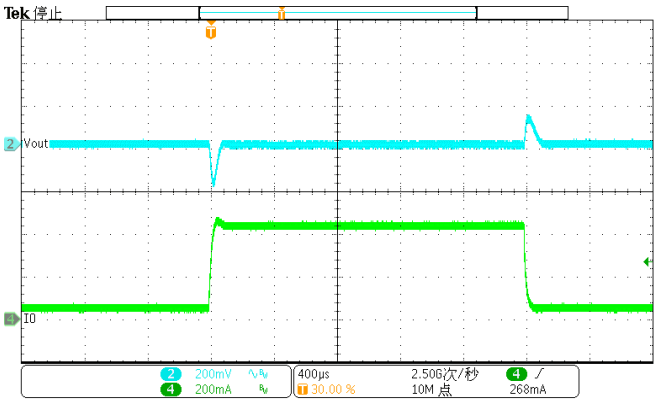



Figure 39. DC-DC Load Transient

(50mA-450mA),VOUT=5V

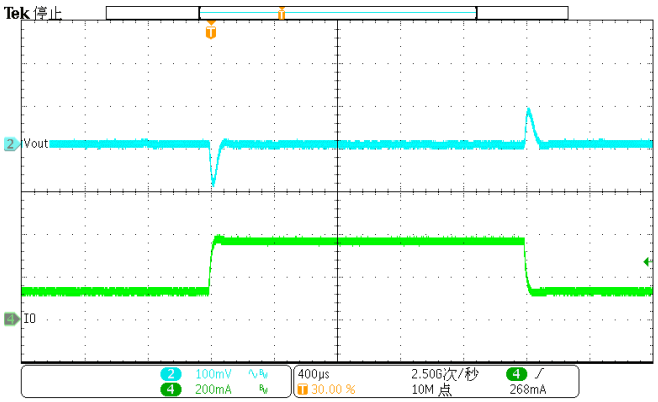



Figure 40. DC-DC Load Transient

(130mA-370mA),$V_{OUT}$=5V

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

**Application Waveforms(Continued)**

Vin=Vout +1V, unless otherwise noted

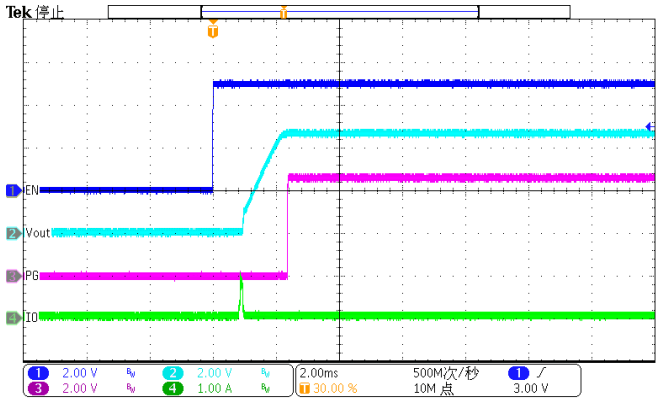



Figure 41. Enable (Iload=10mA)

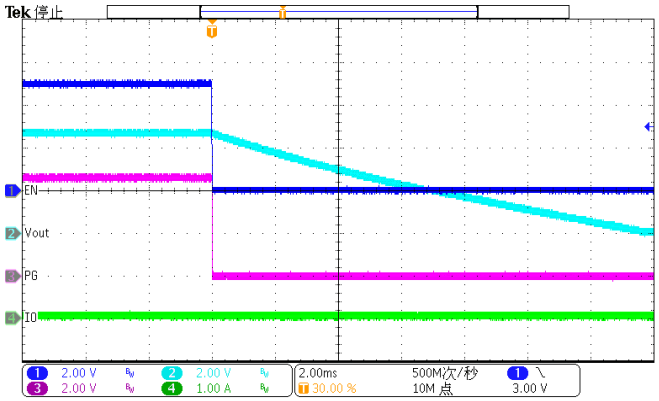



Figure 42. Disable (Iload=10mA)

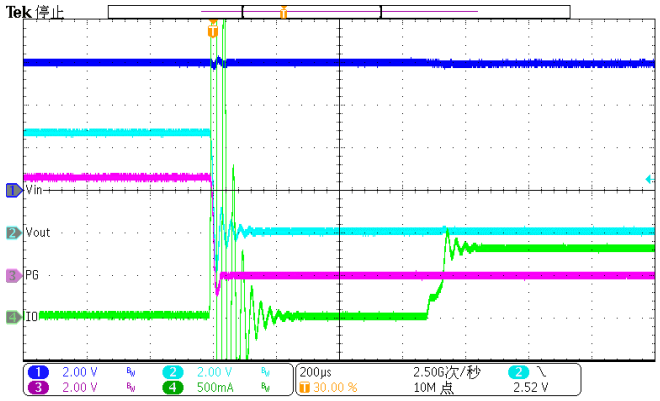



Figure 43. Enter Over Current Protection (Iload=1A)

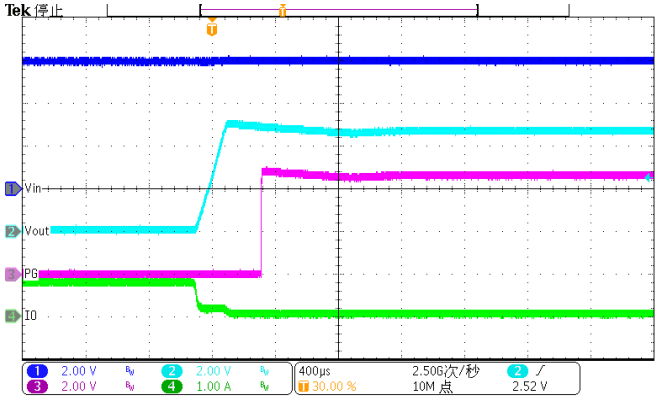



Figure 44. Exit Over Current Protection (Iload=1A)

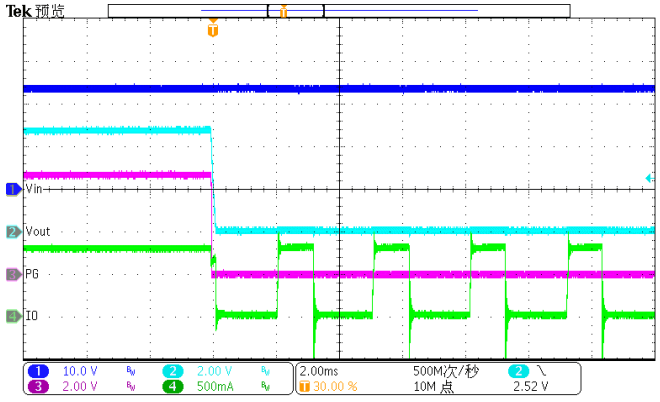



Figure 45. Enter Over Temperature Protection(Vin=24V)

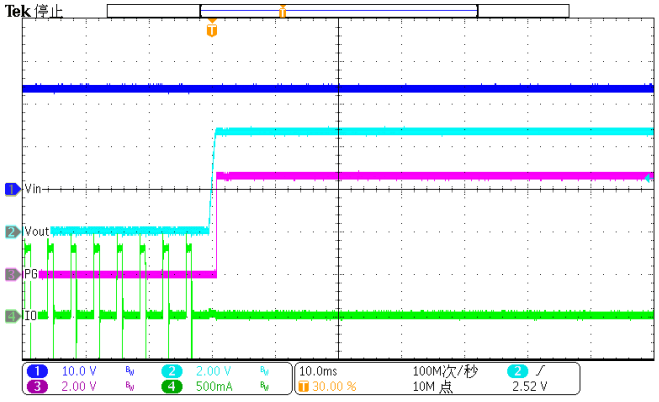



Figure 46. Exit Over Temperature Protection(Vin=24V)

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved 

### Layout Guideline

Proper PCB layout is a critical for SCT71405's stability, transient performance and good regulation characteristics. For better results, follow these guidelines as below:

1. Both input capacitors and output capacitors must be placed as close to the device pins as possible.
2. It is recommended to bypass the input pin to ground with a 0.1μF bypass capacitor. The loop area formed by the bypass capacitor connection, $V_{IN}$ pin and the GND pin of the system must be as small as possible.
3. It is recommended to use wide trace lengths or thick copper weight to minimize I×R drop and heat dissipation.
4. To improve the thermal performance of the device, and maximize the current output at high ambient temperature, SCT recommends spreading the copper under the thermal pad as far as possible and placing enough thermal vias on the copper under the thermal pad.
5. If using large electrolytic capacitor with high ESR resistor, SCT recommends adding a 10uF low ESR capacitor parallel connection with the large electrolytic capacitor.

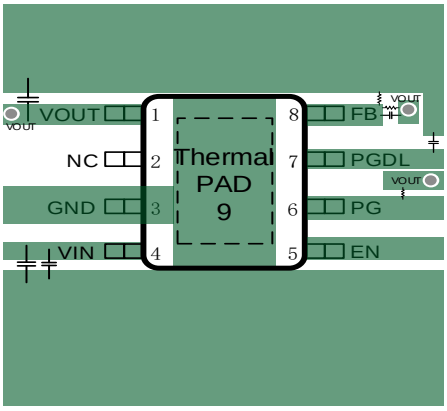



Figure 47. PCB Layout Example

**SCT71405A00STER**

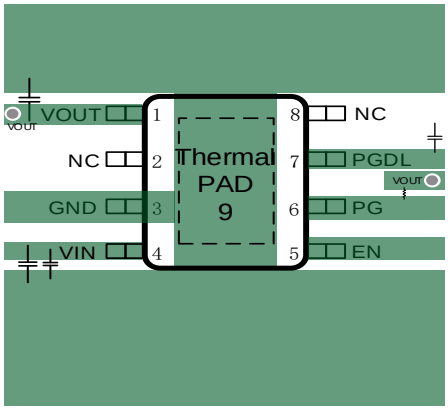



Figure 48. PCB Layout Example

**SCT71405FxxBSTER**

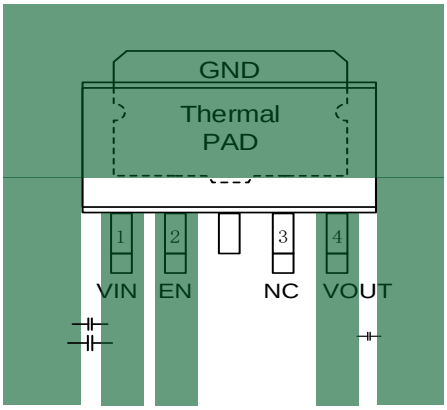



Figure 49. PCB Layout Example

**SCT71405FxxOWCR**


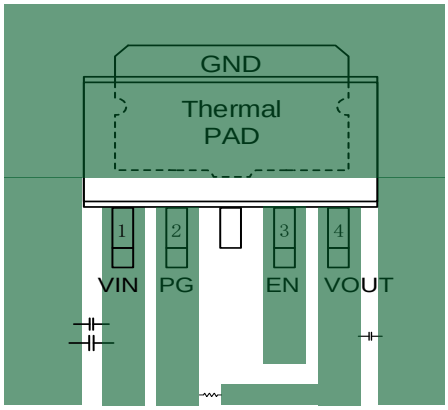



Figure 50. PCB Layout Example

**SCT71405FxxAOWCR**

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved

## PACKAGE INFORMATION

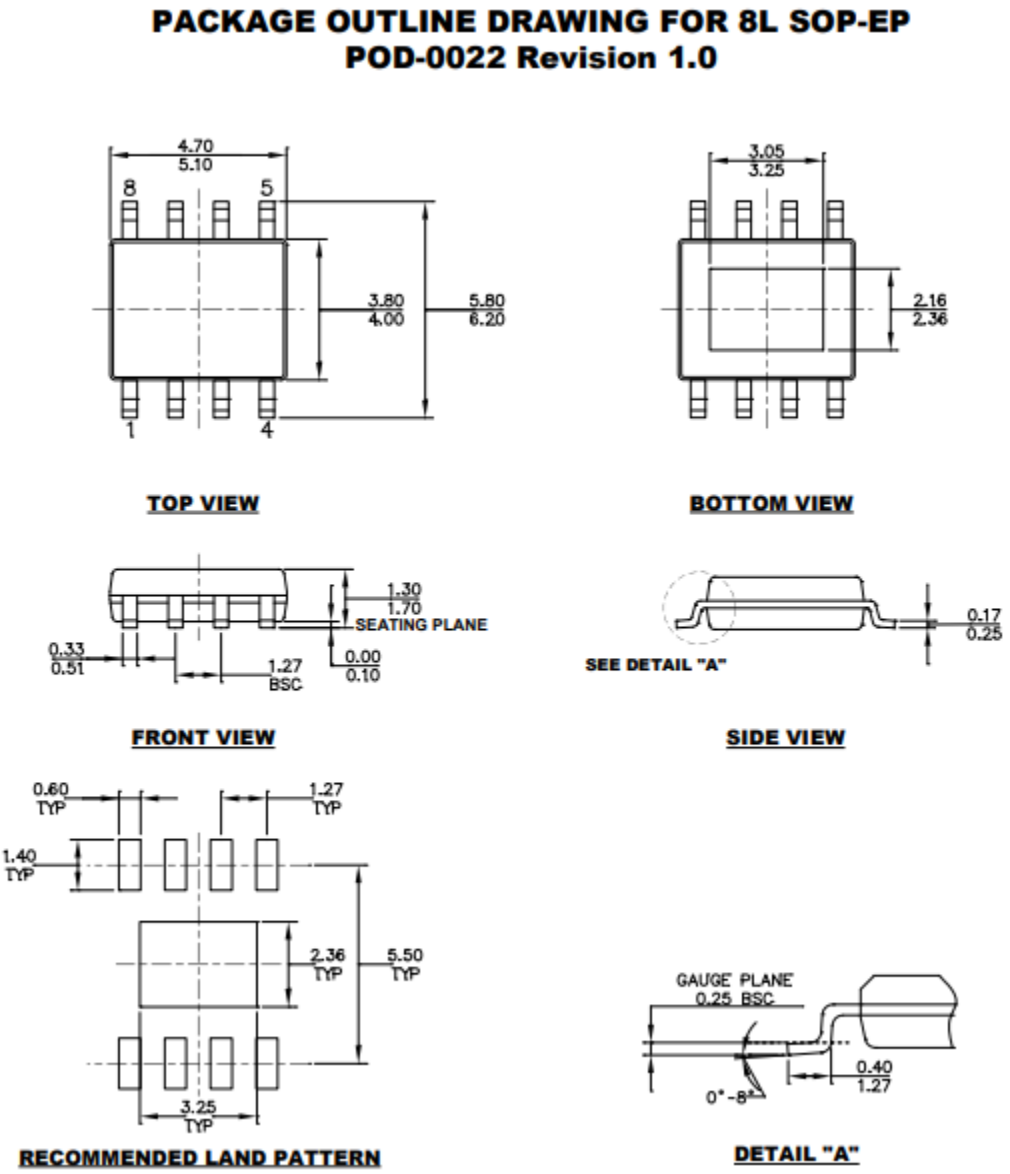


ESOP-8L Package Outline Dimensions


**NOTE:**

1. Drawing proposed to be made a JEDEC package outline MO-220 variation.
2. Drawing not to scale.
3. All linear dimensions are in millimeters.
4. Thermal pad shall be soldered on the board.
5. Dimensions of exposed pad on bottom of package do not include mold flash.
6. Contact PCB board fabrication for minimum solder mask web tolerances between the pins.

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved 

## PACKAGE INFORMATION

**PACKAGE OUTLINE DRAWING FOR TO252-4L**
**POD-0040 Revision 0.0**

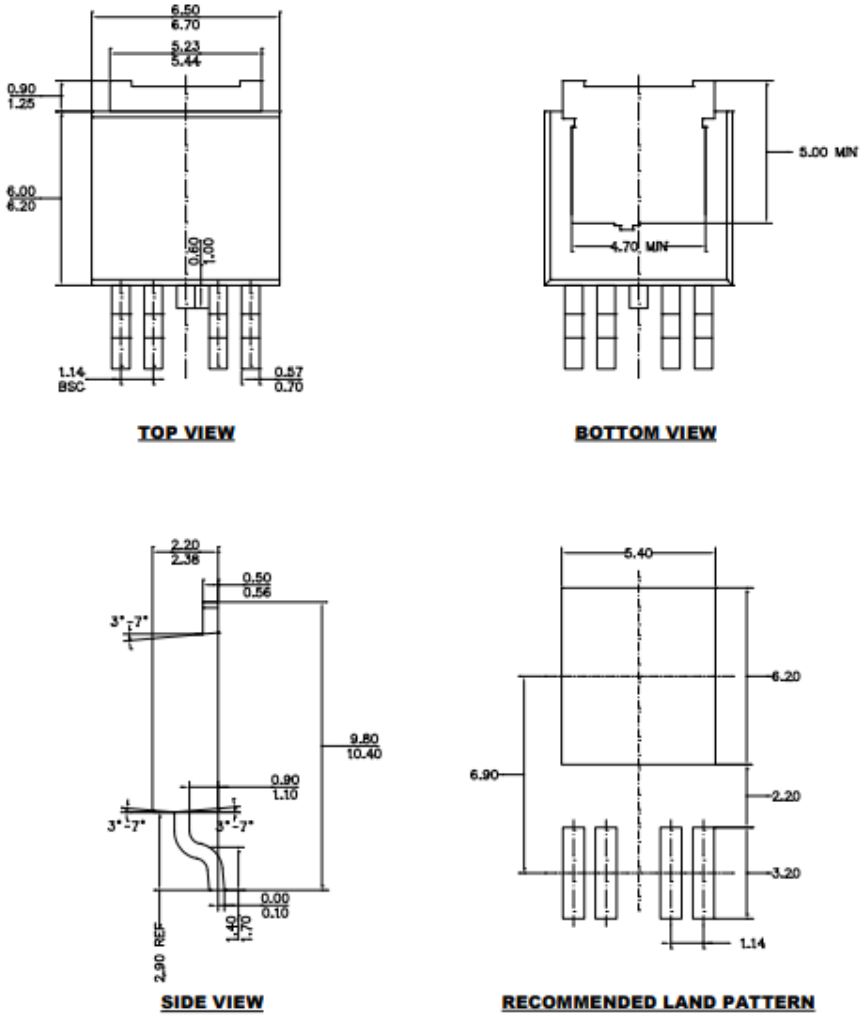


**NOTE:**

1) ALL DIMENSIONS ARE IN MILLIMETERS.
2) PACKAGE LENGTH DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
3) PACKAGE WIDTH DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS.
4) DRAWING CONFORMS TO JEDEC TO-252.
5) DRAWING IS NOT TO SCALE.

TO252-4L Package Outline Dimensions


**NOTE:**

7. Drawing proposed to be made a JEDEC package outline MO-220 variation.
8. Drawing not to scale.
9. All linear dimensions are in millimeters.
10. Thermal pad shall be soldered on the board.
11. Dimensions of exposed pad on bottom of package do not include mold flash.

Contact PCB board fabrication for minimum solder mask web tolerances between the pins.

 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved


## TAPE AND REEL INFORMATION

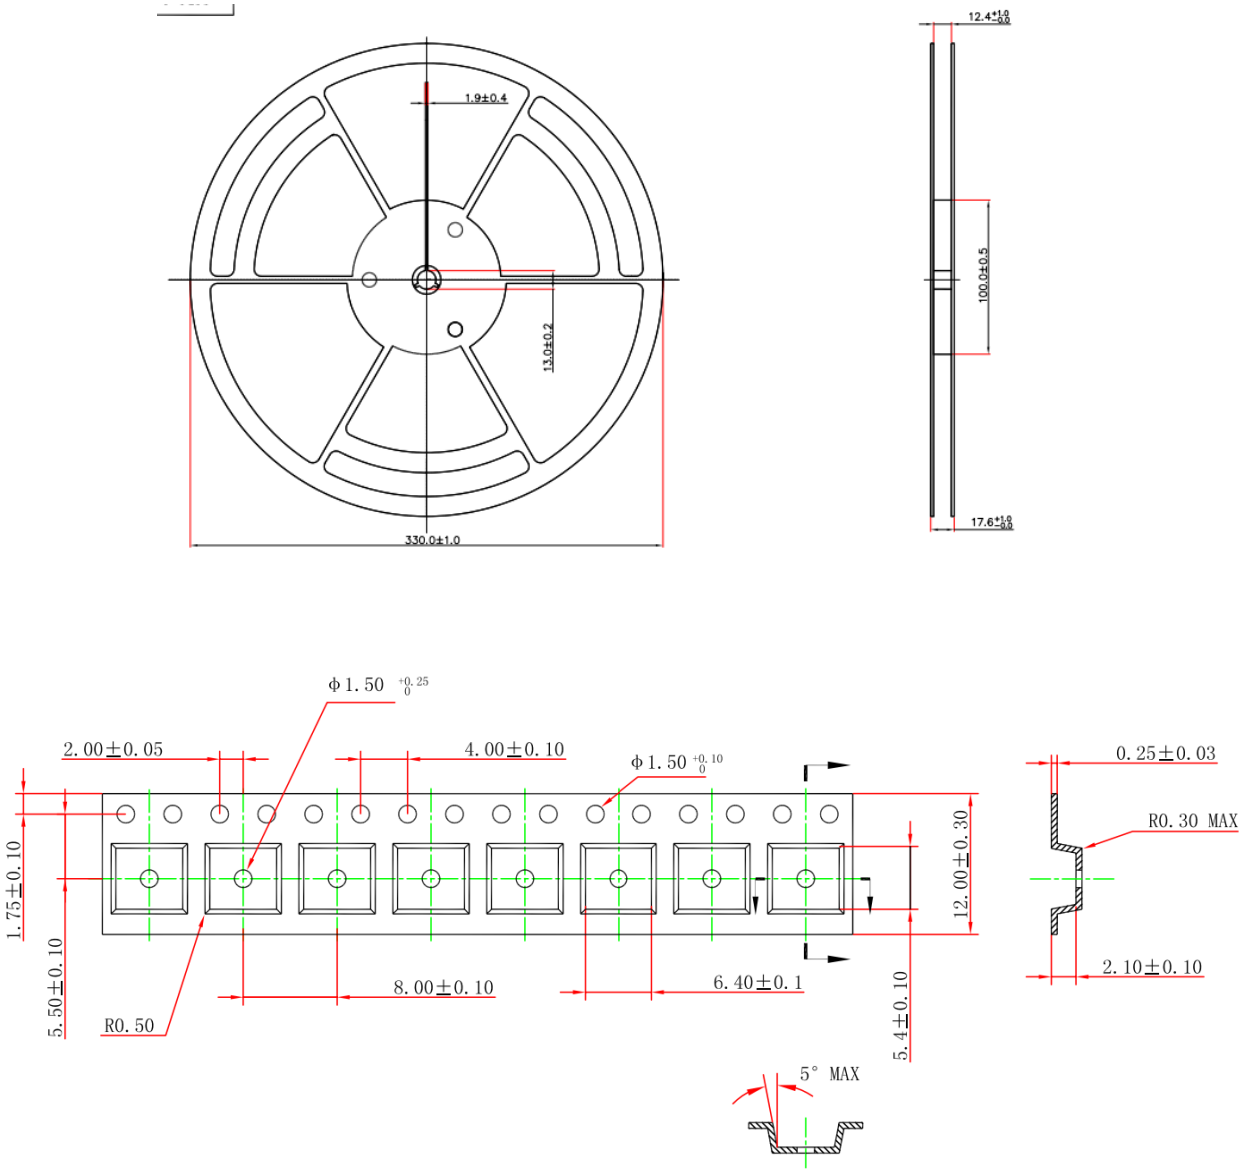



**NOTICE:** The information in this document is subject to change without notice. Users should warrant and guarantee the third party Intellectual Property rights are not infringed upon when integrating Silicon Content Technology (SCT) products into any application. SCT will not assume any legal responsibility for any said applications.


 © 2023 Silicon Content Technology Co., Ltd. All Rights Reserved 

## TAPE AND REEL INFORMATION

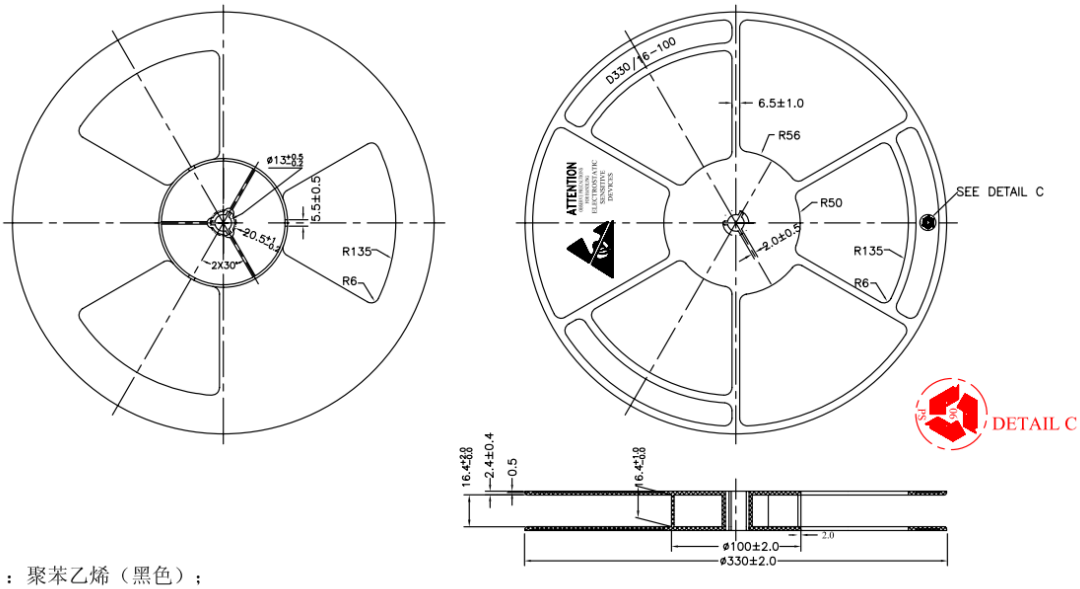


注意：
1. 材料：聚苯乙烯（黑色）；
2. 平整度：最大允许3 毫米；
3. 所有尺寸为毫米；
4. 表面电阻： $10^5$ TO $10^{11}$OHMS/SQ.
5. 所有未注公差：±0.25。

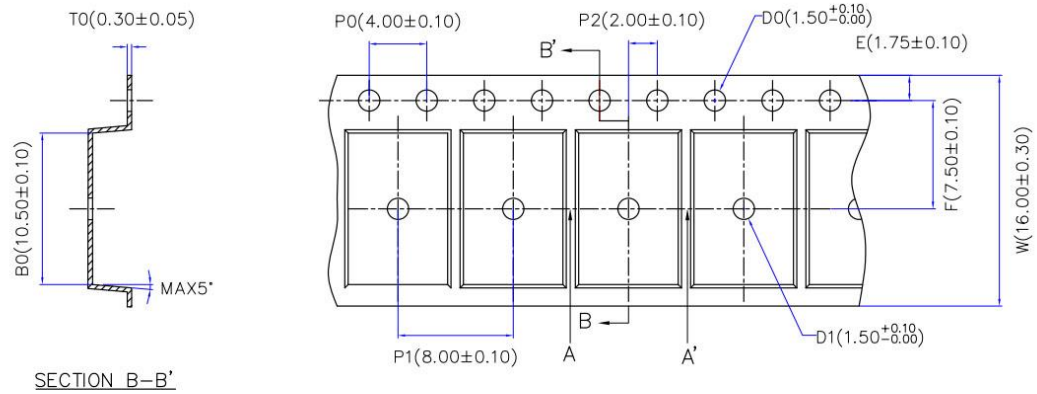


NOTES:
1. ALL DIMS IN MM
2. MATERIAL: BLACK CONDUCTIVE PS
3. The other tolerance not indicated are ±0.10mm
4. 10 sprocket hole pitch cumulative tolerance ±0.20mm
5. Carrier camber is within 1mm in 250mm
6. There must not be foreign body adhesion and the state of the surface must be excellent
7. Surface resistance 1X10E5≤Rs<1X10E9 OHMS
8. Friction Voltage<100V
9. 17" PLASTIC–Reel
TO252

**NOTICE:** The information in this document is subject to change without notice. Users should warrant and guarantee the third party Intellectual Property rights are not infringed upon when integrating Silicon Content Technology (SCT) products into any application. SCT will not assume any legal responsibility for any said applications.